

# Biochemical Incubator

DRYING OVEN

LABORATORY INCUBATOR

MUFFLE FURNACE

WATER DISTILLER

WATER BATH & OIL BATH

HEATING MANTLE

STIRRER

MIXER & SHAKER

HEATING PLATE & SAND BATH

DIGESTION APPARATUS & METAL BATH

NITROGEN SAMPLE CONCENTRATOR

CLEAN BENCH

STERILIZER

VACUUM PUMP

FILTRATION

GRINDER

COLONY COUNTER

DRYER

CENTRIFUGE


ELECTRIC FURNACE

LIFTING TABLE

LABORATORY CONSUMABLE



## Dimension(mm)

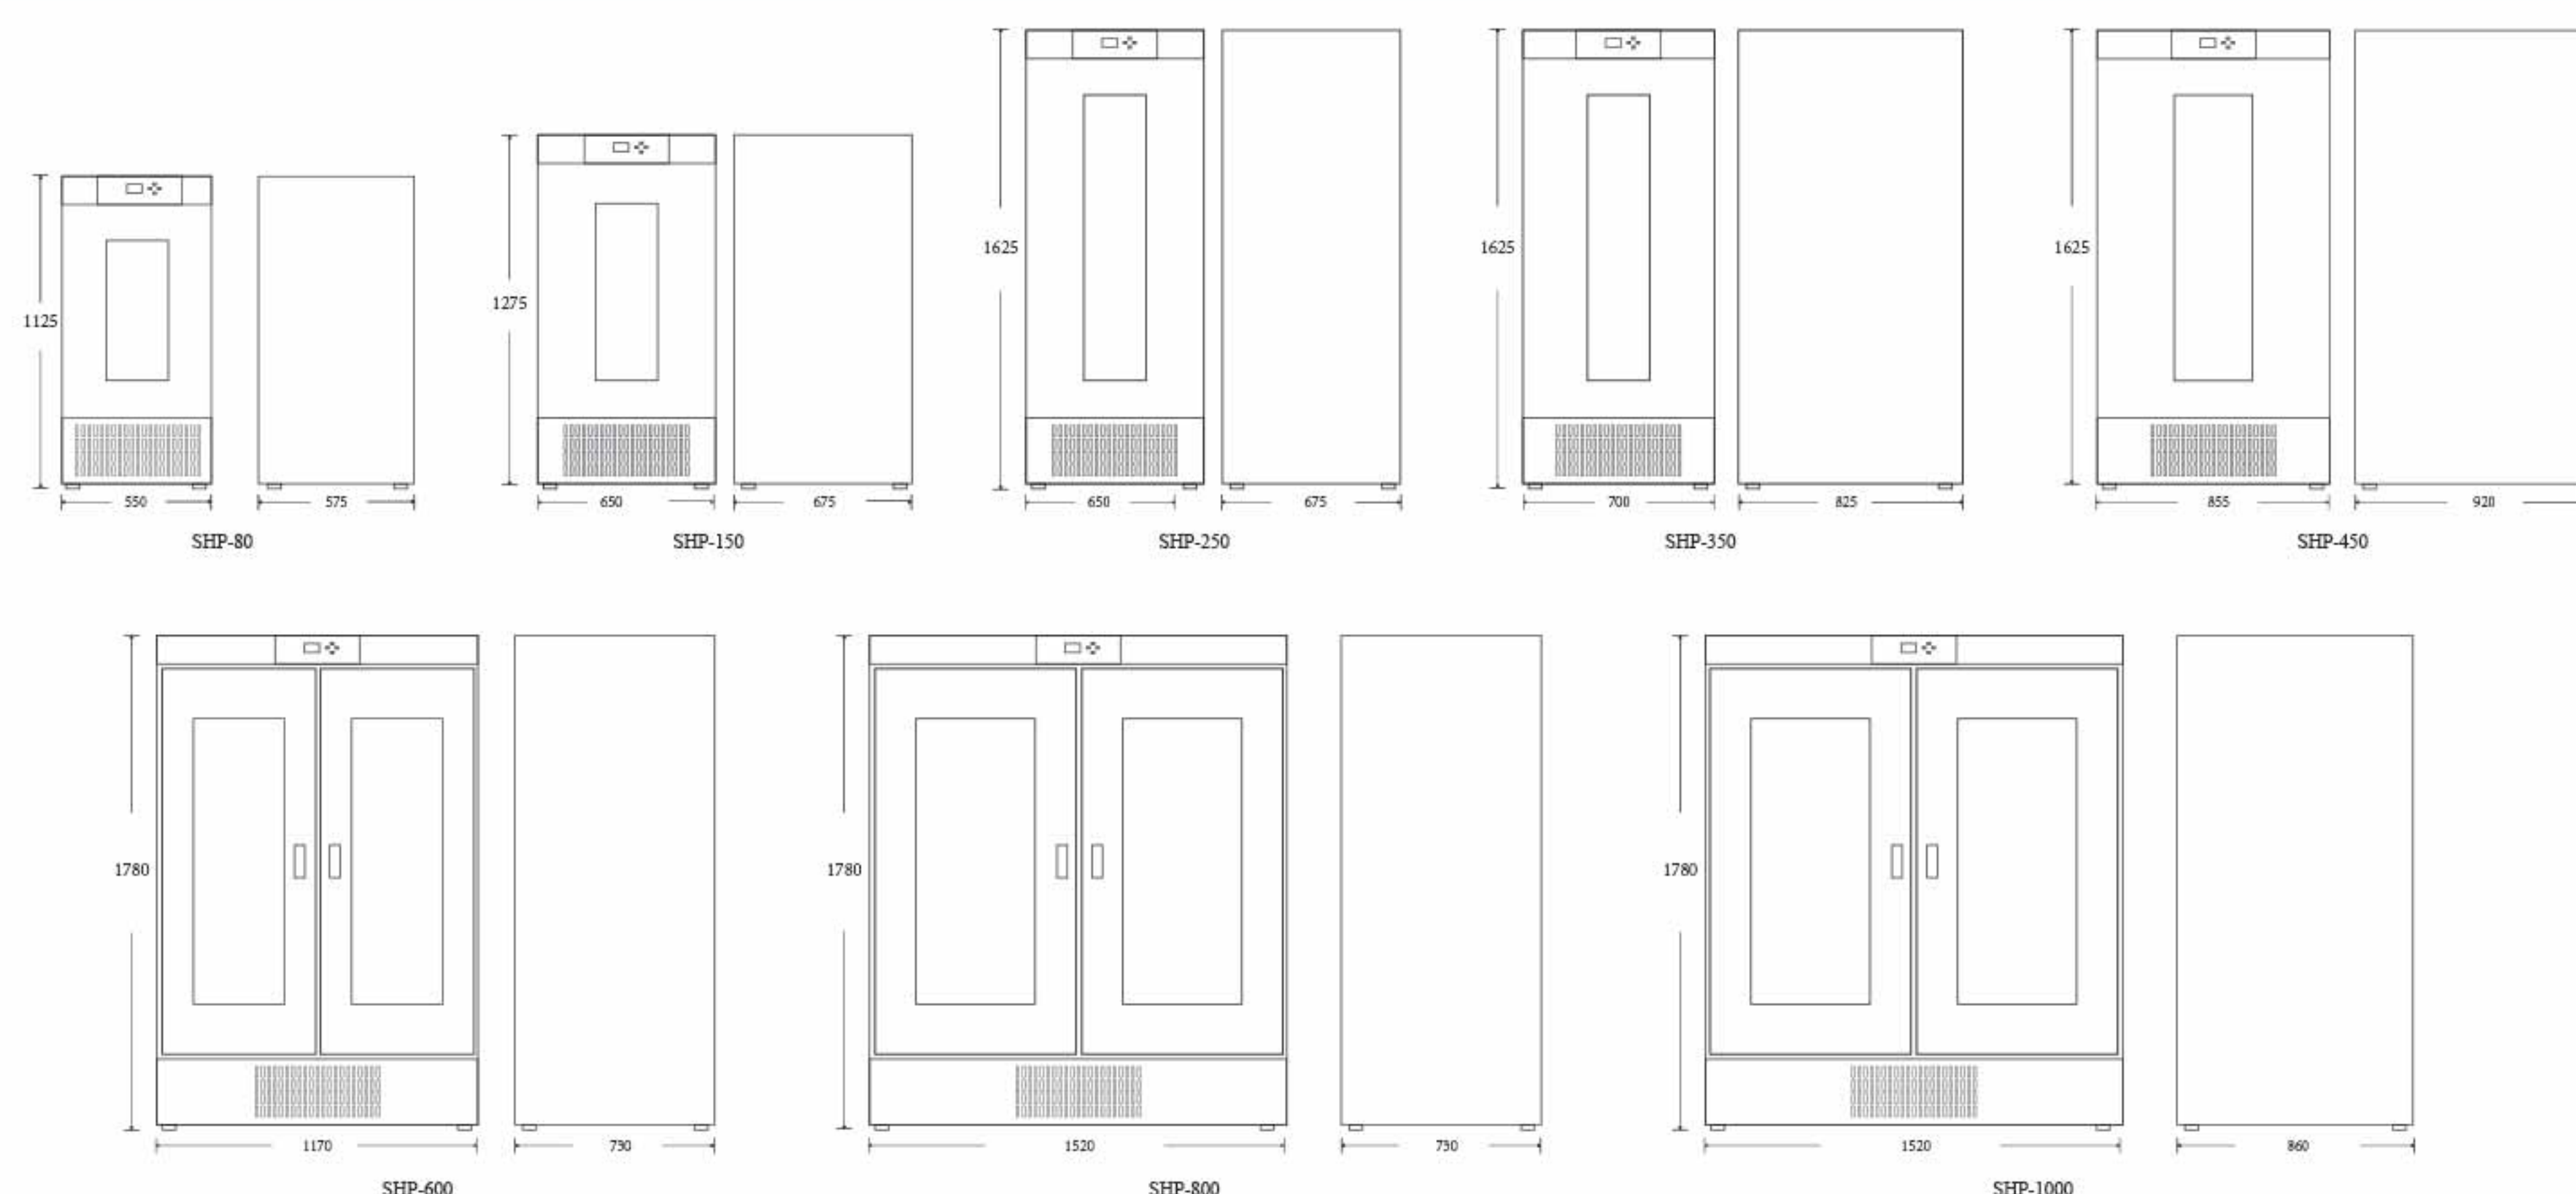



DRYING OVEN

LABORATORY INCUBATOR

MUFFLE FURNACE

WATER DISTILLER

WATER BATH & OIL BATH

HEATING MANTLE

STIRRER

MIXER & SHAKER

HEATING PLATE & SAND BATH

DIGESTION APPARATUS & METAL BATH

NITROGEN SAMPLE CONCENTRATOR

CLEAN BENCH

STERILIZER

VACUUM PUMP

FILTRATION

GRINDER

COLONY COUNTER

DRYER

CENTRIFUGE

ELECTRIC FURNACE

LIFTING TABLE

LABORATORY CONSUMABLE



Necessary for scientific research

Environmental protection and epidemic prevention

Medical testing

Biochemical Incubator can be widely used in the lab of the science research such as environmental protection sanitation epidemic prevention farming and pasturage, drug inspection ,aquatic product , the lab of the junior college academy and production department

### Temperature Fluctuation Sheet:





DRYING OVEN

### Characteristics:

LABORATORY INCUBATOR

- It is the double screen and high luminance charactron display, the display data is exactly and direct- -viewing,and the performance is superiority.
- The number of the shelves and the height between the shelves can be set according to the customer's demands.
- Independent ultra- high temperature protection equipment and working state hint make the user more safety and relianle.
- Use of environmentally friendly cfr -free refrigeration cooling airflow.

MUFFLE FURNACE

WATER DISTILLER

### Major Technical Parameters:

WATER BATH & OIL BATH

HEATING MANTLE

STIRRER

MIXER & SHAKER

HEATING PLATE & SAND BATH

DIGESTION APPARATUS & METAL BATH

NITROGN SAMPLE CONCENTRATOR

CLEAN BENCH

STERILIZER

VACUUM PUMP

FILTRATION

GRINDER

COLONY COUNTER

DRYER

CENTRIFUGE

ELECTRIC FURNACE

LIFTING TABLE

LABORATORY CONSUMABLE

Model	SHP-80	SHP-150	SHP-250	SHP-350	SHP-450	SHP-600	SHP-800	SHP-1000
Cycle Mode	Vertical circulation							
Voltage	110/220V							
Temp. Range (°C)	0~60°C							
Temp. Accuracy (°C)	0.1°C							
Temp.Fluctuation (°C)	±0.5°C							
Sensor	PT100							
Timing range(min)	0~99h59min							
Power (kW)	0.8	1	1	1	1	2	2	2
Woking Room Size (H*W*Dmm)	400*400*500	500*500*750	500*500*1000	600*600*1000	700*650*1000	1030*530*1100	1380*530*1100	1380*660*1100
Overall Dimensions (H*W*Dmm)	550*575*1125	650*675*1275	650*675*1625	700*825*1625	855*920*1620	1170*730*1780	1520*730*1780	1520*860*1780
Volume (L)	80	150	250	350	450	600	800	1000
Shelf Load (kg)	25	15	15	18	15	15	15	15
Max Shelf number (Standard 3 pcs)	6	9	15	15	14	6	6	6
Minimum spacing of shelf (mm)	50					160		
NW/GW (kg)	62/80	79/99.4	92/ 115	100/ 140	160/ 200	180/ 230	200/ 260	230/ 290
Inner Chamber	Mirror stainless steel							
Outer Shell	Cold rolling steel electrostatic spraying exterior							
Insulation Layer	High quality rock wool board							
Heater	Ferrochrome wire							
Test Hole diameter	40mm							
Safety Device	Independent ultra- high temperature protection equipment and working state hint							
	Environmentally friendly cfr -free refrigeration cooling airflow							
Optional Accessories	Programmable controller, independent alarm, 485 port, Printer port, LCD touch screen							
Additional Function	The product is equipped with a test port, which is convenient for testing							